

# FLIR Fido™ X3

## Handheld, Vapor and Particulate Explosives Detection




The FLIR Fido X3 is the lightest and most sensitive handheld explosives trace detector in its class. Its unique TrueTrace™ detection technology identifies military, conventional, homemade, and liquid explosive threats by class on surfaces (particulate) and in bottles (vapor). With a magnesium case and splash-proof seal, its rugged design meets rigorous MIL-STD-810G and IP54 specifications. It starts from cold in five minutes and has a battery that lasts up to eight hours. With clear-down measured in seconds, operators spend more time sampling and less time waiting. Fido X3 expedites on-site decision making with ten-second threat reporting via intuitive, go/no-go alarms. Training can be completed in 30 minutes, further minimizing the impact on day-to-day operations and costs. With thousands of units fielded in over 40 countries, the Fido X-series is the most trusted handheld explosives trace detector for critical security applications.

### CUSTOM APPLICATIONS

- Entry control point screening
- Post-event screening
- Passenger terminal screening
- Bottled-liquid threat screening
- Security sweeps
- VIP protection

### FEATURES & BENEFITS

- TrueTrace detection in <10 seconds
- Broad, class-based identification
- Fast five-minute start-up
- Rapid clear-down within seconds
- Long-lasting, user replaceable battery
- Rugged, MIL-STD-810G, 1-m drop tested
- Simple go/no-go interface
- On device video training
- Firmware updates via WiFi
- No radioactive ionization source
- No calibration requirements

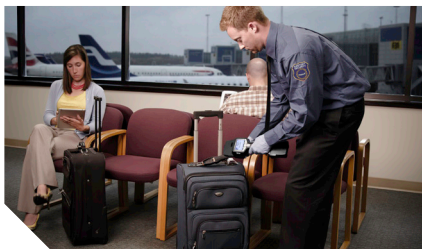

## Specifications

Fido X3	
Technology	FLIR TrueTrace™; multi-channel fluorescence technology; no radioactive source
Sampling & Analysis	
Sample Introduction	Direct vapor for bottled liquids or sampling swipes for surfaces
Sample Phase	Vapor and trace particulate
Threats	Detects military, conventional, homemade, and liquid explosives
Sampling & Analysis	Analysis ≤10 seconds with real-time detection capability
System Interface	
Display & Alerts	Visible, audible, and haptic (vibration) alerts; vivid, sunlight-readable color display (32k colors)
Localization	Language translation available worldwide
Communication	USB; optional embedded wireless; Windows®-based software
Data Storage	3,500 hrs of continuous data logging
User Levels	Operator and Administrator
Power	
Input Voltage	100-240 VAC (wall adapter supplied)
Battery Specs	Two rechargeable Li-ion batteries (swappable and up to 8-hr battery life); adapter included
Startup Time	<5 minutes from cold; <10 seconds from sleep
Environmental	
Operating Temperature	14 to 122 °F (-10 to 50 °C)
Operating Humidity	5% to 95% non-condensing
Storage Temperature	-4 to 122 °F (-20 to 50 °C)
Physical Features	
Dimensions (L x W x H)	14.5 x 4.5 x 2.8 in (37.0 x 11.5 x 7.0 cm) - with battery
Weight	3.0 lbs (1.4 kg)
Enclosure & Protection	Molded magnesium and polymer composite casing with anti-corrosive coating
Standards	ASTM™ E2520

### HEADQUARTERS

FLIR Systems, Inc.  
27700 SW Parkway Ave  
Wilsonville, OR 97070

### DETECTION SALES, AMERICAS

FLIR Detection, Inc.  
2800 Crystal Drive, #330  
Arlington, VA 22202  
Phone: +1-877-692-2120  
detection@flir.com

### DETECTION SALES, APAC

FLIR Detection, Inc.  
3 Pickering Street #03-49  
Nankin Row  
Singapore - 048660  
Phone: +65-6822-1596  
detection@flir.com

### DETECTION SALES, EMEA

FLIR Detection, Inc.  
Luxemburgstraat 2  
2321 Meer  
Belgium  
Phone: +32 (0) 3665 5106  
detection@flir.com

www.flir.com  
NASDAQ: FLIR

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2017 FLIR Systems, Inc. All rights reserved. 16-1695-DET Revised 01/2017